

ED Multi Combo Recessed Downlight Range 26w



LED Gridlight - EFX-RDLDA126





LED Multi Combo Recessed Downlight Range - EFX-RDLDA126

The Eco-FX LED Gridlight offers high luminosity giving efficient heat dissapation. The long life driver offers constant current and voltage. Offering total flexibility in the retail environment.

Product Code

Grid Size

Beam Angle

Input Voltage

Frequency

Transformer Output

Running Current

Power Factor

Chip Set

Efficiency (LOR)

Colour Temperature

Lumen

Efficacy

CRI

TILT

LED Life

Operating Temperature IP Rating Technical 26w (Single)

EFX-RDLDA126

330mm x 180mm & 330mm x 330mm

40°

110-265Vac

50/60 Hz

26W x2 36VDC

700mA

0.9

Bridgelux

92%

Warm White 3000k

Warm White 2000lm

Warm White 76.9lm/w

Warm White >80

30°

50,000Hrs

-20° / +45°

20



















Dimensions

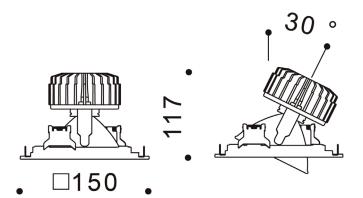

Photometric



h(m)	D(m)	E(lx)
	20°	
1	0.31	4726
2	0.62	1181
3	0.92	525.1
4	1.23	295.4
5	1.54	189

20°

Accessories



Blank Cap



Trim 2



Trim 4