Product Code

Beam Angle Input Voltage Frequency

Transformer Output


Running Current Power Factor Chip Set

Efficiency (LOR) Colour Temperature


> Lumen Efficacy CRI TILT

Gridlight (Triple) 30w

Adjustable

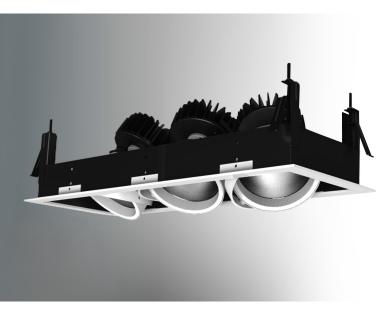

LED Gridlight - EFX-RDLTA310



LED Gridlight 30W - EFX-RDLTA310

The Eco-FX LED Gridlight offers high luminosity giving efficient heat dissapation. The long life driver offers constant current and voltage. Offering total flexibility in the retail environment.

LED Life **Operating Temperature IP** Rating Cut Out

Technical 30w

EFX-RDLTA310
498mm x 188mm x 150mm
55°
110-265Vac
50/60 Hz
10W 25Vdc x3
350mA x3
0.9
Bridgelux
92%
Warm White 2700k
Warm White 800lm x3
Warm White 80lm/w
Warm White >85+
30°
50,000Hrs
-20° / +45°
20
477mm x 168mm



Eco-FX Limited Office 1, 192 Shoreham Street Sheffield S1 4SQ, UK

t: +44 (0) 114 321 9610 e: enquiries@eco-fx.co.uk