

LED Downlight 13w

Adjustable





LED Downlight - EFX-RSDLA13W

LED Downlight 13w - EFX-RSDLA13W

The Eco-FX LED Downlight offers high luminosity COB LEDs giving efficient heat dissapation and produces a softer light. The long life driver offers constant current and voltage.

	Technical 13w
Product Code	EFX-RSDLA13W
Size	101mm x 101mm x 135mm
Beam Angle	30°
Input Voltage	110-265Vac
Frequency	50/60 Hz
Transformer Output	13W 12VDC
Running Current	1050mA
Power Factor	0.93
Chip Set	Bridgelux
Efficiency (LOR)	95%
Colour Temperature	Warm White 3000k
Lumen	Warm White 930lm
Efficacy	71.5lm/w
CRI	Warm White >80
LED Life	50,000Hrs
TILT	30°
Operating Temperature	-40° / +50°


20

BRIDGELUX


IP Rating




LED Downlight Dimensions and Cut-out view

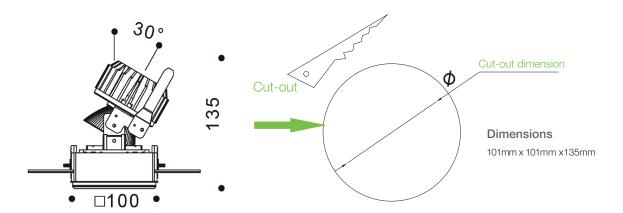

LED Downlight Light Distribution and Illuminance





Beam Angle 30°

hen the luminaire is at diffe

Eco-FX LimitedOffice 1, 192 Shoreham Street
Sheffield S1 4SQ, UK

t: +44 (0) 114 321 9610 **e:** enquiries@eco-fx.co.uk

Absolute Maximum Rating

Parameter	Rating
Operating Temperature	-40° / +50°
IP Rating	20