

NEW Ultimate 400W LED Flood Light



Ports



Airports



Outdoor Fields



Ports



Parking Lots



Golf Courses



Product Code:
EFX-IPCTP5400

Product Description – EFX-IPCTP5400

using Fluid Dynamic Pressure (FDP) technology.

- Return on investment can be achieved after 1 year of operation!
- Highly energy efficient technology achieving a rating of 94.
- Ultra light and compact design for easy and safe installation.
- World leading heat management technology ensuring the long life and high performance of the LEDs. 46°C maximum.
- Various light beam angle options including 20, 30, 40, 60 & 120 degrees, suitable for numerous applications
- The Ultimate 400W Flood Light consists of the highest quality components available in today's technology, making it the Ultimate lighting solution for any high power application.
- 5 Year Warranty

Applications

- Outdoor Fields
- Building Exteriors
- Golf Courses
- Train Stations
- Factories/Warehouses
- Car Parks
- Ports
- Sporting Arenas
- Sports Courts/Stadiums
- Airports

Technical 400w

Rated Power	400w
Power Factor	>70.93
Lamp Input Voltage	AC 190-270v
Frequency Range	50/60Hz
Electrical Efficiency	94
Luminous Efficiency	73lm/pw - 83lm/pw
Color Rendering Index (CRI)	83
Colour Temperature	3000k - 5700k
Control Mode	CC
Luminous Flux	29511 - 33200lm
Beam Angles	20°,30°,40°,60°,120°
LED Life	50,000 Hrs
Protection Grade	IP67
Dimensions (W/D/H)	Ø428x359mm
Lamp Weight	13kg
Working Temperature	-40°C- +70 °C
Chip	Philips Rebel



Eco-FX Limited

Office 1, 192 Shoreham Street
Sheffield S1 4SQ, UK

t: +44 (0) 114 321 9610
e: enquiries@eco-fx.co.uk

w: www.eco-fx.co.uk

Issue March 2013


©Copyright 2013 - Eco-FX Limited

NEW Ultimate 400W LED Flood Light


Product Code: EFX-IPCTP5400

Hinge Bracket


Main AC Power Cord

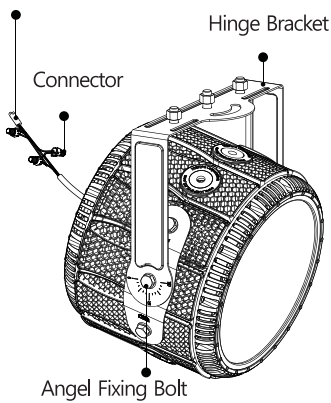


Hinge Bracket + Pillar Bracket II -Option3

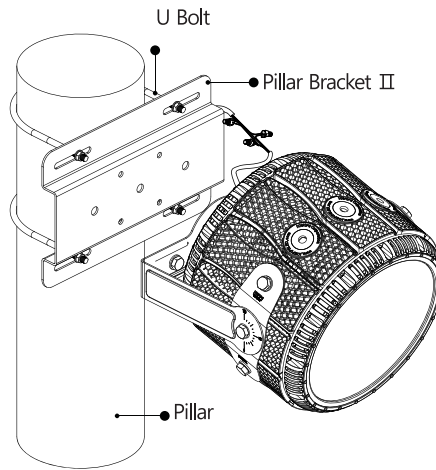

Hinge Bracket + Pillar Bracket II -Option3

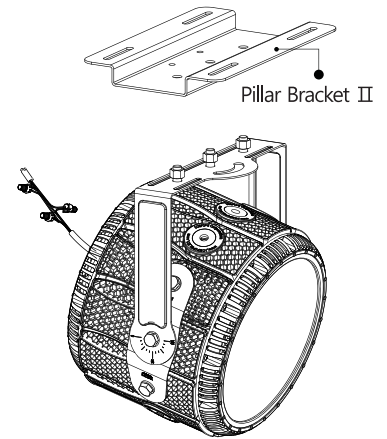

Light Distribution Curve 20°

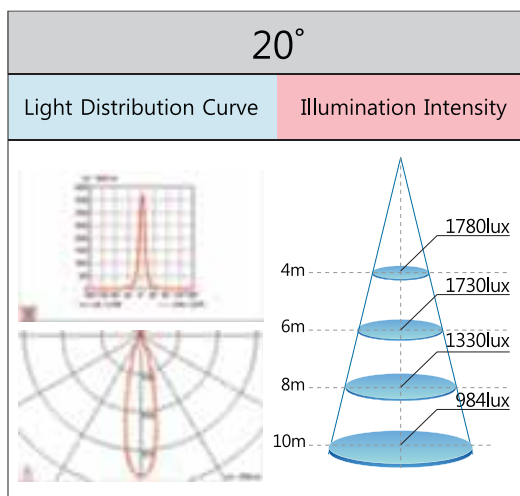

Dimensions

